

2-2E-A-SS-QFC FLOW CENTER

SPECIAL 2 CIRCUIT FLOW CENTER NOW AVAILABLE IN QT SERIES!

DESIGNED FOR 6 TO 10 TON SPLIT COILS OR
TOTAL 28* GPM WITH 2 PUMPS ON EACH
CIRCUIT FOR ONE COMMON LOOP FIELD.



Features & Benefits

Check Valve
Pump Protection

2 Year Limited Warranty
Customer Assurance

Solid Durable Construction
Long Life

Removable Lid
Fast Installation, Easy to Fill

1 1/4" Swivel Connectors on Pumps
Fast and Flexible Installation

Non Pressurized Flow Center
Eliminates Callbacks

Ease of Handling and Installation

Foam Insulation
Eliminates Condensation

Air Separation Chamber
Continually Performs Purging Function

180 DEGREE MODEL



1 1/4" Brass IPT Return Inlet

The [EA QT Flow Center](#) is designed to provide long, reliable operation in an attractive cabinet, while providing installation and service benefits. The stylish insulated cabinet provides flexible installation without feeling the need to hide it out of sight.

SIMPLE INSTALLATION

Because the [QT Flow Center](#) is completely packaged at the factory, installation is simple. The system should be mounted on the floor. Simply connect a return line from the earth system to the QT Flow Center. Then connect a supply line from the QT to the heat pump unit. That's all there is to adding reliable pump protection to any closed loop system. Also available is the [Flow Meter Tool](#), an exclusive service tool which provides a direct reading of system flow rate, eliminating the uncertainty associated with current methods.

Pump Curves

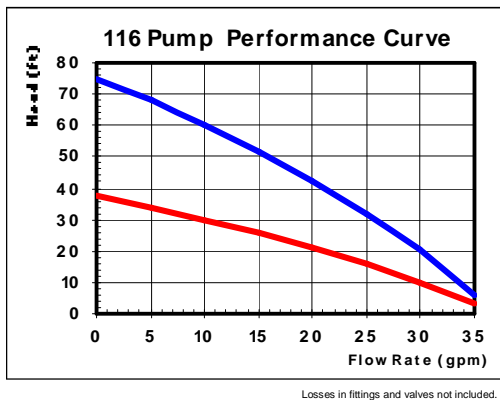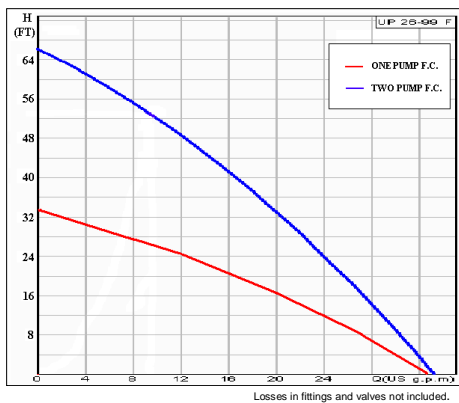

QT Specifications

*Dimensions are approximate

